





## FLEXCOAT™ APPLICATOR SERIES


### Configurable Applicator for Continuous or Intermittent Coatings up to 500 m/min and 1000 mm Lamination Widths

Save money by minimizing your spare parts stock and create faster work changes with the new Valco Melton FlexCoat™ Applicator Series, which can be easily configured for continuous or intermittent applications. A new adjustable nozzle is an effective low cost solution that allows lamination in both directions. This can easily be removed for ultra-fast shim set-up.


- Save time. Easily switch from Standard to High Speed Coating by simply changing the modules.
- Get quality, strength, and precision at a lower cost and with a long lasting applicator.

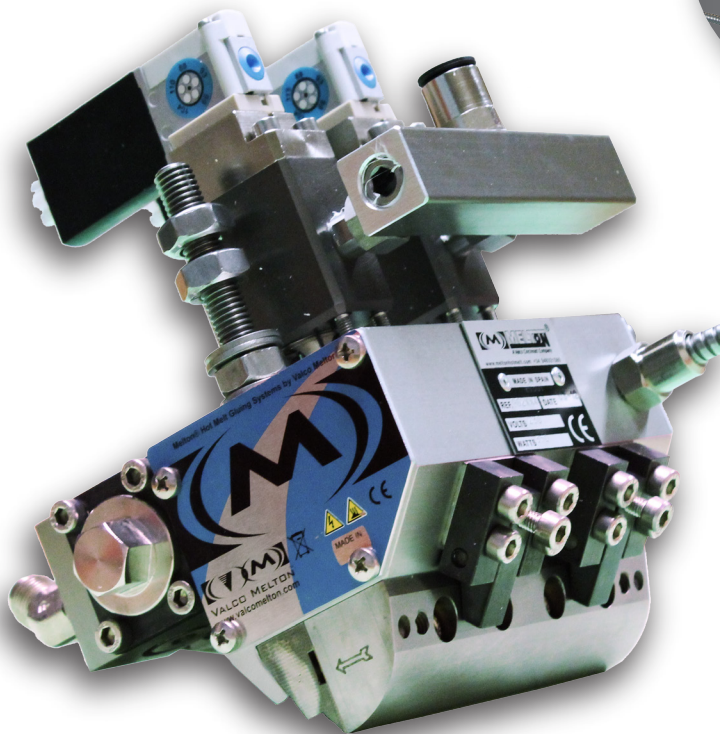


For intermittent applications, the new long-lasting MI III Speed Cut Modules provide an exceptional cut-off as well as improved repeatable application.



An anodized aluminum body is used for a light, but strong applicator with excellent thermal performance. V-Shaped profile facilitates installation in constricted spaces.



Nozzle can be turned to allow lamination in both directions. Easy removal for minimum set-up times.





Optional adjustable filter can be turned to face the most convenient position for easy maintenance.

For continuous applications, the new MP III normal-cut modules assure a precise cut-off and excellent repeatability.



All the FlexCoat Series include a new nozzle mechanism for an easier and faster shim setup.

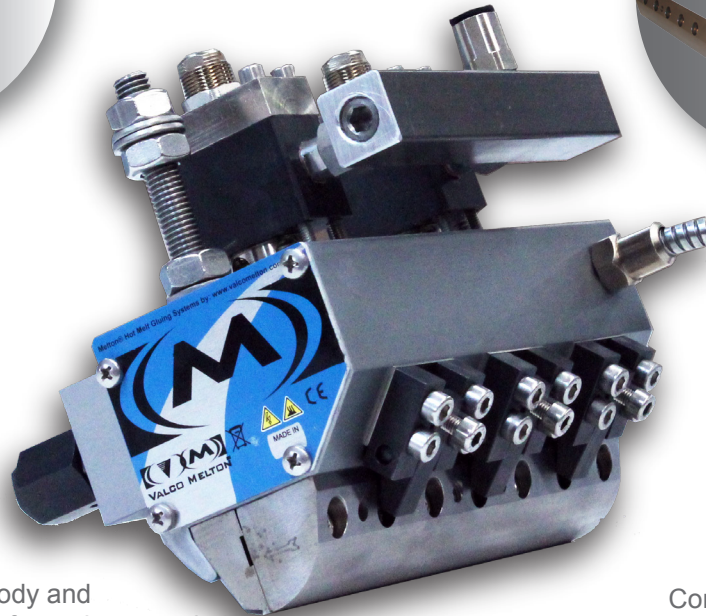


Anodized aluminum body and hardened steel nozzle for resistant and long-lasting guns with a highly precise application.

Completely configurable. No increment limitations for applicator width.

## Technical Specifications

Characteristics	High Speed Coat	Standard Coat
Maximum Coating Width:	1000 mm	
Temperature Control:	PT-100 / NI-120 / FEKO / NTC	
Coating Thickness Range:	0.025mm - 1 mm	
Max Operating Temperature:	240°C	
Max Operating Pressure:	100 bar	
Operating Speed:	500 m/min	
Cycle Time:	5 ms	15 ms

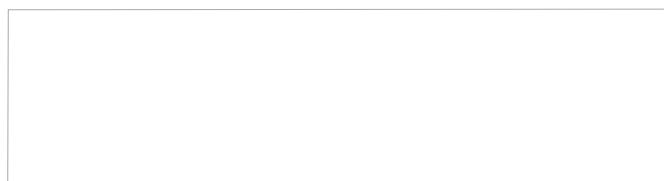

For more information, visit <http://hub.am/17QlrY5> or contact your local Valco Melton representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.3612

Europe Headquarters: Spain, Navarra • Tel:+34.948.321.580 • Fax:+34.948.326.584

Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7854 • Fax:+86.592.591.7834

info@valcomelton.com • Serving over 76 Countries Worldwide • valcomelton.com